


HAND BREAKERS

For Finishing, Light Works to Heavy Duty Works !
Full Line Up of Our Hydraulic Standard Hand Breakers

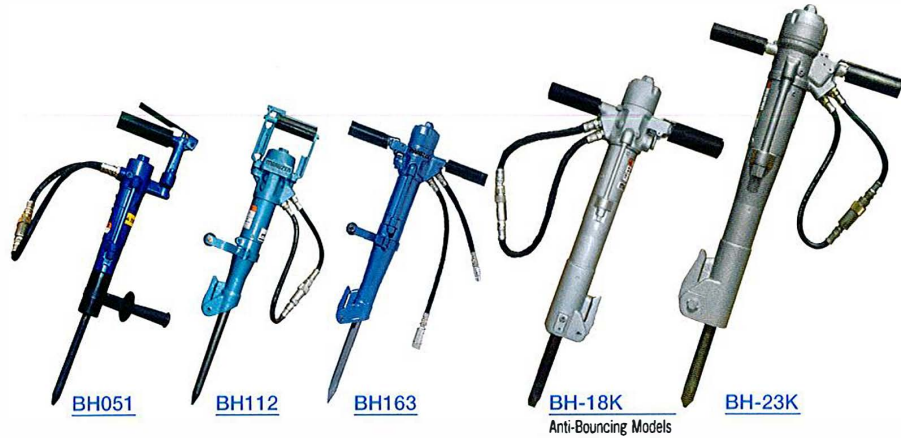

BH051

BH112

BH163

BH-18K

BH-23K

Anti-Bouncing Models



FEATURES:

- 1.Excellent breaking power than any other gas, electric or pneumatic breakers in the same class..
- 2.High quality and durability
- 3.Easy maintenance
- 4.Low noise and vibration.

Standard Models

Model	BH051	BH112	BH163	BH18K	BH23K
Dimensions(mm/in)	428×176 (x)	556×156 (22×7)	604×412 (24×17)	622×412 (24 1/2×17)	702×420 (28×17)
Net weight (kg/lbs)	5.5 (12)	11 (24)	16 (35)	18 (39)	24 (52)
Oil flow (L (Gal) /min)	20 (5)	9-25 (2-6)	14-28 (3-7)	14-28 (3-7)	20.5 (5)
B.P.M.	2800	1500-2200	1200-2000	1700	1050
Shank size(hex mm /in)	19×50 (3/4×2)	22×83 (7/8×3-3/4)	25×108 (1×4-1/4)	25×108 (1×4-1/4)	25×108 (1×4-1/4)
Impact power (J)	30	55	80	80	120

New Line Up!


BH20EV
Anti-Vibration +
Anti-Bouncing Model

BH16VS
Low Noise,
Anti-Vibration Model

Model	BH20EV
Dimensions (mm/in)	665×410 (26×16)
Net weight (kg/lbs)	20.5 (45)
Oil flow (L (Gal) /min)	20.5 (5)
B.P.M.	1450
Shank size (hex mm /in)	25×108 (1×4-1/4)
Impact power (J)	80
Vibration Level (m/sec ²)	8.56

Model	BH16VS
Dimensions (mm/in)	678×410 (27×17)
Net weight (kg/lbs)	19 (42)
Oil flow (L (Gal) /min)	20.5 (5)
B.P.M.	1450
Shank size (hex mm /in)	25×108 (1×4-1/4)
Impact power (J)	70
Vibration Level (m/sec ²)	8.56

Anti-Vibration Models



BH051V

BH112V

BH161V

BH251V

Model	BH051V	BH112V	BH161V	BH251V
Dimensions (mm/in)	443×165 (17-1/2×6-1/2)	573×165 (22-1/2×6-1/2)	660×410 (26×16-1/8)	748×432 (29-1/2×17)
Net weight (kg/lbs)	6 (13)	13 (28)	17.3 (38)	26 (57)
Oil flow (L (Gal) /min)	20 (5)	9-25 (2-6)	14-28 (3-7)	20.5 (5 or 8)
B.P.M. at 20L	2700	1450	1650	1050
Shank size (hex mm /in)	19×50 (3/4×2)	22×83 (7/8×3-1/4)	25×108 (1×4-1/4)	32×153/160 (1-1/4×6)
Impact power (J)	30	55	80	120
Vibration Level (m/sec ²)	6.5	6.2	8.56	5.6