

HBM Plug Wiring

U.S. STD Plug




The U.S. STD (Standard, EP30) Plug Does NOT have any specific wiring pattern. The HBM Series vibrator is a 3 phase motor, allowing it to run CW or CCW. Take note of the special "epoxy" heat shrink wire connectors which insure proper wire connection.

The U.S. TL (Twist Lock) Plug is a 5 pin grounding type plug. The HBM U.S. Series vibrators do NOT use the center ground pin. Green Wire to "X" White Wire to "Y" Black Wire to "Z"

U.S. TL Plug



CSA TL Plug

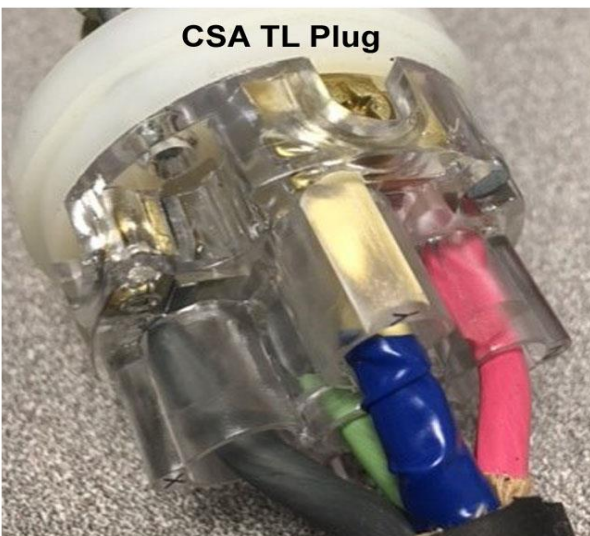

The CSA TL (Twist Lock) Plug is a 5 pin grounding type plug. The HBM CSA Series vibrators have a specific wiring configuration using the center ground pin. Green Wire to "Center Pin" White Wire with Blue Mark to "Y" Black Wire to "X" Red Wire to "Z"