

High Frequency Inverters

Features:

- * Continuous Duty Solid State Design
- * Variable Speed Control for Vibration VPM
- * Single & Three Phase Input Power Options



HC116B




HC230A



HC116B single phase & HC230A three phase shown

H260B Shown Above

Inverter Vibrator Capacity			
Vibrator	HC116B	HC230A	H260B
HBM40VF	3	4	6
HBM50VF	2	3	5
HBM60ZX	1	2	4
HKM75LFS	1	2	4

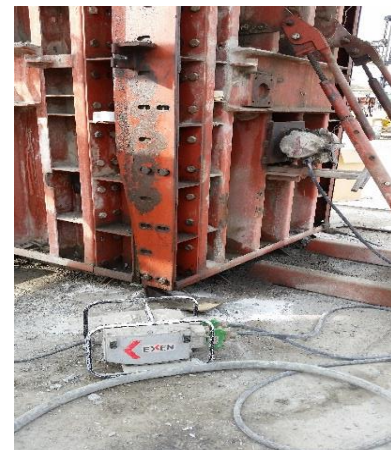

48 Volt, 3 Phase, 100- 240Hz Output



Standard plug is designed exclusively for ISKCO high frequency vibrators

Model	Part Number	KVA	Input V	Fqcy	Outlets	Weight (Kgs)
HC116B (STD)	000624000	1.6	115/1ph	240 Hz	2	22 (10)
HC230A	041298300	3	220/3ph	100-240Hz	3	34 (15)
H260B	041298600	6	220/3ph	100-240Hz	4	100 (46)

***The ONLY 240Hz frequency inverter in the market...13,800vpm
HBM vibrator speed UNDER LOAD!***